

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
15 January 2004 (15.01.2004)

PCT

(10) International Publication Number  
**WO 2004/006528 A1**

(51) International Patent Classification<sup>7</sup>: **H04L 27/38**

(21) International Application Number:  
PCT/SE2002/001325

(22) International Filing Date: 3 July 2002 (03.07.2002)

(25) Filing Language: English

(26) Publication Language: English

(71) Applicant (for all designated States except US): TELE-  
FONAKTIEBOLAGET LM ERICSSON (publ)  
[SE/SE]; S-126 25 Stockholm (SE).

(72) Inventors; and

(75) Inventors/Applicants (for US only): WEINHOLT,  
Dan, Rutger [SE/SE]; Enskärsgatan 15, S-421 60 Västra  
Frölunda (SE). GUSTAVSSON, Per-Olof, Gerhard  
[SE/SE]; Körsbärsvägen 21, S-435 43 Pixbo (SE).

(74) Agent: ERICSSON AB; Patent Unit West, SE-431 84  
Mölndal (SE).

(81) Designated States (national): AE, AG, AL, AM, AT, AU,  
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,  
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,  
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,  
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,  
MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG,  
SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ,  
VN, YU, ZA, ZM, ZW.


(84) Designated States (regional): ARIPO patent (GH, GM,  
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),  
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),  
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,  
ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SK,  
TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,  
GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guid-  
ance Notes on Codes and Abbreviations" appearing at the begin-  
ning of each regular issue of the PCT Gazette.

(54) Title: EMBEDDED KEYING

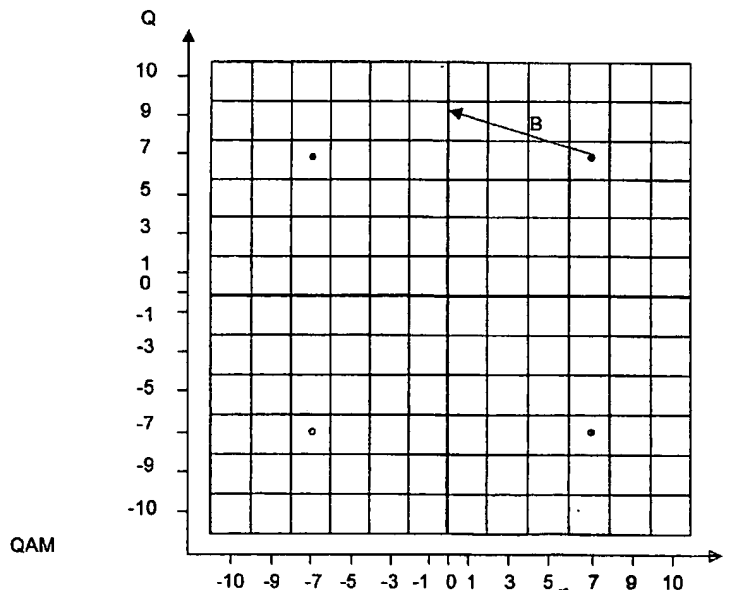

(57) Abstract: Method of communicating digital data in which frames (8) are transmitted cyclically whereby a first number of symbols is transmitted according to a first keying mode (H) using a first constellation, and a second number of symbols is transmitted according to a second keying mode (L) using a second constellation. The first and second keying modes (H, L) are used at predetermined positions in the frame, whereby both the symbols according to the first and second keying mode carry information under at least an operative traffic phase.

WO 2004/006528 A1

Embedded keyingField of the invention

5

The present invention relates to principles of phase modulation coding and decoding, which may be utilised in various types of telecommunication systems. The invention is especially applicable for radio communication systems.

10 Background of the invention

A commonly used principle for transmitting data over a radio channel and for overcoming the signal rate limitation of binary sequence signalling is to make use of four or more unique symbols. Thereby, the bit rate can exceed the maximum signal rate (in bits/s) corresponding to double the pass-band (in Hz) as given by the Nyquist theorem.

15

Quadrature phase shift keying (QPSK) also denoted 4-state quadrature amplitude modulation (4-QAM) involves that two-bit words are coded into four discrete symbols. These symbols can be represented as signal vectors in the complex plane having constant amplitude but four distinct phase values in relation to a reference signal. Detection is carried out by establishing which of four quadrants in the complex plane the received signal can be referred to.

20

If a higher modulation order is used, the bit rate can be increased further. However, higher requirements are inflicted on the detection stage since it becomes more difficult to detect the individual symbols from one another, as they appear closer in the complex plane. The deterioration of the signal as transmitted over a given media also constitutes a limitation to the possible number of symbols being used.

25

Higher order keying is commonly referred to as M'ary QAM, where  $M = 2^N$  refers to the number of discrete symbols being available, whereby N bits can be transmitted per symbol. M'ary QAM is also referred to as M'ary APK (amplitude phase shift keying), as both the amplitude and phase may vary for individual symbols.

30

Figure 1 shows a conventional transmitter and figure 2 shows a conventional receiver.

35

The transmitter unit comprises a data buffer 1, a mapper 2, baseband filtering unit 3, intermediate frequency (IF) oscillator 6, phase divider 5, adders 7, and summer 4 from which a radio frequency (RF) signal is transmitted.

- 5 Data stored temporarily in buffer 1 is conveyed to the mapper 2 in accordance with the rate data can be transmitted over the radio interface. The data, which can be seen as a binary bit serial string, is partitioned into symbols by the mapper 2 having an I component and Q component in the complex plane as explained above.
- 10 The receiver, on the other hand, decodes I and Q components multiplying the incoming signal (RF) with 90 degree phase skewed signals provided by signal oscillator IF12 from divider D11. The signal of IF 12 is typically rendered coherent by means of a carrier recovery PLL (phase locked loop) with the carrier signal from IF 6, such that the RF signal, after being filtered in respective filters 9 and 10, can be decoded back into the complex
- 15 plane. An error signal E corresponding to the deviation of the detected symbol value from an expected symbol value is fed into PLL loop back filter 13 adjusting IF generator IF 12.

Fig. 3 and 4 show a conventional scheme for transmitting data. A frame alignment word

20 F1 consisting of a predetermined sequence of symbols functions as a reference for subsequent frames of traffic data B1, B2..BN-1. For example, the frame-word may have a length of 8 bits. After transmission of a fixed period of frames, the frame alignment word is repeated. Via a frame-aligner 15, in which the predetermined sequence is recovered, the demodulator, can identify the individual frame position for each frame.

25 As shown in fig. 4', each frame following the frame alignment word may include a pilot signal.

As is shown in fig. 4'', the frame alignment word may comprise a single pilot signal,

30 which is discernible from the remaining symbols.

In known systems, the frame alignment word (or pilot signal) may for instance appear for every 20.000 symbols.

35 Since pilot signals are associated with "spectral peaks", and therefore may disturb other channels or systems, the frequency at which pilot signals occur is normally restricted.

By definition, frame alignment words and pilot signals do not contain any traffic information (payload) and are therefore regarded as an overhead to the information being transmitted.

5

Forward error correction (FEC) methods can advantageously be used to restore the signal content where the signal to noise ratio impairs the signal. However, as is known, FEC implies using some redundancy or overhead to the information being transmitted.

10 Prior art document EP1022874 discloses an apparatus for digital data transmission, utilising for instance M'ary QAM. A frame configuration is used in which a pilot symbol, i.e. a signal carrying no traffic data, is inserted for every N-1 information symbols. The receiver estimates the phase, amplitude variation and frequency offset on the I-Q plane from the pilot symbol, by inserting for instance three pilot signals in a row. In order to increase transmission efficiency, symbols immediately before and after a single pilot symbol are modulated according to a modulation type different from the pilot modulation type. A method is shown for differentiating the modulation type for modulating pilot symbols from the modulation type for modulating symbols immediately before and after a pilot symbol, which includes placing two or more signal points of each one symbol immediately before and after a pilot symbol on a virtual line connecting the pilot signal point and the origin in the in-phase I - quadrature Q plane. According to one embodiment of the above document (fig. 13), the pilot symbol and the symbols immediately before and after the pilot symbol coincide with symbols of a 64-QAM-modulation scheme used for data transmission.

25

#### Summary of the invention

It is a first object of the invention to set forth a method, which provides for a robust, high bit rate data transmission, which is also bandwidth efficient, and which lessens requirements on the hardware.

30

This object has been accomplished by the subject matter set out in claim 1.

35 It is a further object to set forth a method of transmitting data, which provides further bandwidth efficiency.

This object has been accomplished according to claim 2.

5 It is a further object to provide for robust symbol detection and error compensation, while transmitting information.

This object has been accomplished by claim 3.

10 It is a further object to set forth an improved method for frame alignment.

This object has been achieved by the subject matter of claim 9.

15 It is a further object to further optimise the transmission efficiency by adapting to varying channel conditions.

This object has been achieved by claim 10.

20 It is a further object of the invention to reduce the negative effects of thermal noise in the receiver stage.

This object has been achieved by the subject matter of claim 13.

25 Further advantages will appear from the following detailed description of preferred embodiments of the invention.

#### Brief description of the drawings

30 Fig. 1 shows an outline of a conventional transmitter,

fig. 2 shows an outline of a conventional receiver,

fig. 3 shows a typical known frame timing diagram,

35 fig. 4 is a detail of fig. 3,

fig. 4' and 4'' show other known frame timing diagrams,

fig. 5 shows a 128QAM-keying constellation,

5 fig. 6 shows a QAM keying constellation being imbedded in the complex plane of fig. 5 according to a first embodiment of the invention,

fig. 7 shows a QAM keying constellation being imbedded in the complex plane of fig. 5 according to a second embodiment of the invention,

10

fig. 8 shows an exemplary frame-format for the transmitted data according to the first embodiment of the invention,

15 fig. 9 shows an exemplary frame alignment procedure for the received symbols according to the first embodiment of the invention,

fig. 10 shows an exemplary variable insertion rate procedure according to a fourth embodiment of the invention,

20 fig. 11 shows an exemplary receiver according to the invention,

fig. 12 discloses an error signal vector  $E$  and other values,

25 fig. 13 discloses an preferred weighting function according to a preferred embodiment of the invention, and

fig. 14 discloses an alternative heightening function according to the invention.

30 Detailed description of a preferred embodiment of the invention

The present invention utilises a transmitter and receiver that could be outlined as shown in figures 1 and 2. Reference numbers pertaining to figures 1 and 2 will be used in the following for explaining the invention.

35

According to the invention, data is mapped into the complex plane by utilising at least two keying modes. According to a first embodiment of the invention, a first keying mode utilising the symbols shown in fig. 5 is used for symbols  $n$  to  $n+t-1$ . Subsequently, a second keying mode corresponding to the symbols in fig. 6 is used for the symbol  $n+t$ .

- 5 Thereafter, the first keying mode is used for the subsequent symbols and subsequently, data is mapped according to the second keying mode.

By way of example, the first keying mode, H, could correspond to 128QAM coding. As can be seen, both the phase and the amplitude of the signal vary. Words of 7 bit of data  
10 is transferred from the buffer 1 and mapped into 128 distinct symbols, also denoted signalling points, by mapper 2.

The second keying mode L corresponds to a lower keying mode than the first keying mode. For instance, the second keying mode could correspond to 4QAM keying. In the  
15 second keying mode, two-bit data words from buffer 1 are mapped into four symbols, also denoted signalling points, arranged in the four respective quadrants in the complex plane. It is noted that the symbols (7, 7; 7, -7; -7, 7; -7, -7) of the second keying mode coincide with four symbols of the first keying mode shown in fig. 5. Hence, the second keying mode symbols constitute a subset of the first mode keying symbols.

20 The way the first and second keying modes are distributed over time has been illustrated in fig. 8.

It is noted that the invention is not restricted to 128QAM/ 4QAM for the first / second  
25 keying mode, but that many other combinations, wherein the first keying mode is of a higher order than the second keying mode, could be used.

As indicated by the cross in bold lines in fig. 6, detection of the four distinct symbols in the second keying mode is more easily accomplished due to the enhanced distance to  
30 the neighbouring symbols and the detection boundaries. The exemplary vector B illustrates that the receiver may detect a "distorted" signal for a symbol that was mapped at co-ordinate (7,7). If the signal is within the error area at co-ordinates (0, 9) the receiver will still detect that the symbol should reflect a symbol value (7,7), which could be assigned to the two-bit word 11. In comparison with exemplary vector A, in fig. 5, it is seen  
35 that the error margin is much larger in the second keying mode than the first keying mode.

It appears that, since the error signal 16 can obtain greater values for the second lower order keying mode L than the higher order keying mode H, the system is capable of providing coherent detection under far greater errors, than if the first higher order keying mode was used exclusively. Once the synchronisation is established, an enhanced - and more correct - error signal may adjust the IF generator, every time a lower keying order symbol is transmitted.

Moreover, since the second lower-order keying mode is intended to be inserted at a relative high rate and the demodulator can correctly adjust the IF generator 12 in a larger area relatively frequent, the possibilities for correctly decoding signals on a heavily disturbed channel are enhanced. The transmission is rendered more robust for the cost of a slightly impaired data capacity.

When comparing the constellations of figure 5 and 6, it appears that the average energy of the first keying mode signal and the second keying mode signal are comparable, as their average envelope are about the same.

Before correct mapping can be carried out, the de-mapper 14 must know which keying mode was utilised for modulating a given symbol in the received signal. The present invention may realise synchronisation in a number of different manners.

A routine according to the first embodiment of the invention residing in frame-aligner 15 provides continuous monitoring of the incoming signal. If we assume that data is randomly distributed, it is noted that the coinciding symbols (7, 7; 7, -7; -7, 7; -7, -7) will occur more frequent than the remaining symbols represented in fig. 3, as the coinciding symbols always appear when the second keying mode is utilised.

In fig. 9, the procedure for frame synchronisation according to the first embodiment has been shown. The incoming string 22 comprises symbols according to the first higher-order keying mode H and to the second lower-order keying mode L, respectively. Symbols belonging to the group of coinciding symbols, i.e. any of the symbols of fig. 6, have been indicated by dotted fields 23, whereas the 124 symbols of fig. 5 not belonging to the coinciding symbols (i.e. the 128 - 4 symbols) are indicated by blank fields.



The aligner 15 continuously monitors frames (B1 and B2) of incoming symbols of length  $t+1$  and for each incoming frame, incoming symbols are ordered according to their position in the frame (B).

- 5 Each incoming symbol is assigned to a given field of a register 24 having a number of fields  $S_1$ -  $S_{t+1}$  corresponding to the number of symbols  $t+1$  in the frame, whereby a symbol of a given frame position is assigned a field of a corresponding order number.

For this purpose, fields  $S_1$ -  $S_{t+1}$  of register 24 are continuously updated. Each field in  
10 register 24 contains a commutative integer value to which the number 1 is added if in the given frame a symbol belonging to the overlapping group (dotted) is detected, and the value - 1 is added if another symbol (blank) appears. In the present example the value +1 is added to registers S3 and S10, while the value - 1 is added to the remaining fields of the register 24.

15 Over time, it will appear that a certain field in register 24 has a positive value while the remaining values are negative. The particular register which turns positive indicates the position in the string 22, where a symbol of the second keying mode appears in the given frames B1, B2. Thereby, the data 20 can be aligned or synchronised with the incoming string of symbols. In the present example, field S10 will indicate the cyclic position of the second keying mode symbols.

According to a second embodiment of the invention data are mapped into symbols shown in fig. 7 in the second mode L, while the first mode symbols of fig. 5 is used. As  
25 appears, the symbol constellations of the first and second modes do not coincide.

Since the symbols of fig. 7 represent a larger signal envelope than the symbols of fig. 5, the distinction of which symbols should be mapped to the first, respectively the second keying mode can be accomplished by frame aligner 15, by discriminating on the signal  
30 envelope.

Moreover, according to a third embodiment, a frame alignment word, utilising either modulation according to the first or second keying mode, is used to align frames. The frame-words appear cyclically, e.g. at a frequency of 1000 - 10.000 frames.

35

For all above embodiments, for severe channel conditions, one symbol of the second keying mode is for example inserted for every 5 - 20 symbols of the first keying mode.

5 For better channel conditions, one symbol of the second keying mode is for instance inserted for every 100 symbols of the first keying mode.

According to a fourth embodiment, the rate of inserting symbols of the second mode in the stream of symbols of the first keying mode - in the following, the insertion rate - varies dynamically with conditions.

10

This embodiment has been illustrated in fig. 10. Frame alignment words, for instance appearing at every 10.000 symbols, indicate which insertion rate applies. A portion Q of a frame-word indicates which class of insertion rates and corresponding predetermined frame patterns are used for subsequent frames. Advantageously, the insertion rate is varied dynamically in dependence on the current quality level that characterises the channel. The first frame-word F1 indicates that a first insertion rate of one second-order-keying-mode symbol is used per frame B1 at a first channel quality. The second frame-word F2 indicates that a second insertion rate of two second-order-keying-mode symbols is used per frame B1+m at a second channel quality, which is impaired in comparison to the first quality.

20

Preferably, the rate is doubled, halved or unchanged for every new frame alignment word within a certain range of possible alternatives. Conventional bit error rate measurements based on checksum operations could be used to estimate the channel quality.

25

For this reason, a conventional return channel (not shown) is provided for signalling the received quality level back to the transmitter.

For all above embodiments it applies that, at the start of a communication session, dummy data corresponding to a number of frames of symbols could be processed such that the synchronisation can be performed. For instance, dummy data are sent during an initialisation phase in which a number of frames of random information are sent. Data can also be re-transmitted during the initialisation phase. When synchronisation has been established and it is found that the bit error rate attain an acceptable level, for instance, the operative traffic phase can be adapted, whereby only traffic data is transmitted using the first and second keying modes. The bit error rate can be examined by

35

normal checksum operations. Such methodologies are frequently used in higher protocol layers of the OSI (open standard interface) model, to which the present invention may be used.

- 5 As mentioned above, an error signal vector  $E$  corresponding to the deviation of the detected symbol value  $D$  from an expected reference symbol value  $R$  is detected in demapper 14 and is fed into PLL loop back filter 13, which deviates a control value  $E'$ , also denoted deviated error signal. For instance  $E'$  may relate to the angle  $\varphi$  between vectors for points  $D$  and  $R$ . The latter signal is used to adjust IF generator IF 12, so that it is rendered coherent with the signal of IF6. In fig. 12, the above relations have been shown.

The estimation of the error control value  $E'$  depending on the vector  $E$  can be accomplished in many ways, whereby two preferred embodiments according to the invention are mentioned here:

15

According to a first aspect, the constellation area is divided into 4 sectors for which the error control signal is determined as follows:

I: for sector A -  $|D\_Q| \geq |D\_I|$ :  $E' \equiv E\_I$

20

II: for sector B -  $|D\_Q| < |D\_I|$ :  $E' \equiv E\_Q$

According to a further aspect, the constellation area is divided by four lines through the origin into 3 sectors, A, B and C. The definition of these sectors and the weighted error value used for detected symbols in the associated sectors are given as follows:

25

III: for sector A -  $|D\_Q| \geq 2 \cdot |D\_I|$ :  $E' \equiv E\_I$

IV: for sector B -  $|D\_Q| < \frac{1}{2} \cdot |D\_I|$ :  $E' \equiv E\_Q$

30

V: for sectors non A, non B:  $E' \equiv \frac{E\_I + E\_Q}{2}$

According to a further embodiment of the invention, a weighting function is used as performed by exemplary receiver shown in fig. 11. The receiver is similar to the one shown in fig. 2, except that a weighting filter 17 is provided.

5 One common noise contributor is related to the thresholds of the QAM decision device, i.e. the contribution of noise when the detected symbol approaches the square shaped symbol detection boundaries for instance shown in fig. 5. In those cases where the noise component is larger than the distance to the symbol boundary, the error signal will get a wrong sign, which will disturb the PLL tracking heavily.

10

According to the invention, this effect can be reduced by applying the above weighting function that suppresses the detector output for points close to the boundaries.

15 The weighting can be accomplished in a number of ways. However, it is a basic objective to reduce the sharp transitions in the detector output when the detected signal D approaches the decision boundaries, which otherwise would result in the typical "saw-tooth" shape of the detector vs. phase error response and to subdue responses outside the detector boundaries.

20 According to a preferred embodiment of the invention the following relation is used for weighting the occurring symbol error:

$$\text{VI: } WE = E' \left(1 - \frac{2W}{T}\right) \text{ for } -\frac{1}{2}T \leq E' \leq \frac{1}{2}T$$

25 where T corresponds to the boundary size as indicated in fig. 12 and E' corresponds to deviated control error and  $W = \text{Max} \{ \text{abs}(E_I); \text{abs}(E_Q) \}$ , and

$$\text{VII: } WE = 0 \text{ for } E' < -\frac{1}{2}T \vee \frac{1}{2}T < E'$$

30 where T corresponds to the boundary size as indicated in fig. 12 and E' corresponds to deviated control error.

The above weighting will result in a parabolic shape of the detector vs. phase error response. The error weighting has been illustrated by line 26 in fig. 13.

35

According to an advantageous embodiment of the invention, the weighting function above is used in connection with the symbols coded according to the first keying mode (H) line 26 but not the second keying mode (L) - line 28. According to the determination made by frame aligner 15, it is signalled on line 18 whether a symbol coded according to the first keying mode is received. If this is the case, weighting filter 17 is controlled to apply the weighting function as denoted by line 26, otherwise the (non-weighted) weighting function according to line 28 is used.

As appears from fig. 13, the false phase errors (WE), which otherwise would have occurred, if no weighting function were utilised are substantially reduced. Consequently, the possibilities for erroneously adjusting the PLL loop have been reduced.

The phase errors of the second keying mode, as illustrated by line 28 in fig. 13, on the other hand, are not weighed and are fully contributing to adjusting the PLL loop, every time - according to the invention - the symbols of the second keying mode appears in the stream of symbols.

In fig. 14, an alternative weighting function using discrete values has been shown.

Returning now to the benefits of the invention, since no pilot symbols are used and hence only information is transmitted, a particular high bandwidth-efficiency is accomplished. The transmission is rendered very robust due to the provision of the high-amplitude error vectors accommodated during the second keying mode.

The present invention may advantageously be used with FEC (forward error correction coding) and this is favourable especially for channels with a high degree of disturbances. The error correction capabilities of FEC algorithms are typically reduced in case of high burst error probabilities. Burst errors are usually related to the phase tracking capability of the receiver and since this capability is improved by the invention, the overall benefits of the invention are enhanced for a FEC coded channel.

Patent claims

1. Method of communicating digital data, comprising the steps of  
5 cyclically transmitting frames (B) comprising  
  
a first number of symbols according to a first keying mode (H) using a first constellation,  
  
10 a second number of symbols according to a second keying mode (L) using a second constellation, whereby the first constellation includes more signalling points than the second constellation,  
  
the first and second keying modes (H, L) being used at predetermined positions in  
15 the frame, whereby  
  
both the symbols according to the first and second keying mode carry information under at least an operative traffic phase.  
  
20
2. Method according to claim 1, wherein the number of symbols sent under the second keying mode (L) in a frame (B) amounts to 1.
- 25 3. Method according to claim 1 or 2, wherein the second constellation is a subset of the first constellation.
4. Method according to any of claims 1-3, wherein the second constellation comprises at least two signalling points.  
30
5. Method according to any preceding claim, wherein 1 symbol out of 5 - 20 in a frame B is modulated according to the second keying mode (L).  
35

6. Method according to any of claims 1 - 4, wherein 1 symbol out of 20 - 100 in a frame B is modulated according to the second keying mode (L).
- 5 7. Method according to any of claims 1 - 6, wherein a frame alignment word (FW) comprising a sequence of predetermined symbols, is inserted periodically after a plurality of frames (B) is being transmitted.
- 10 8. Method according to claim 7, wherein a frame alignment word is inserted for every 1000 - 10.000 symbols.
- 15 9. Method according to claim 2 or any of claims 2 - 6, wherein during reception, for each incoming frame, ordering incoming symbols according to their position in the frame (B),
- 20 assigning each incoming symbol to a given field of a register (24) having a number of fields ( $S_1$ -  $S_{t+1}$ ) corresponding to the number of symbols (t+1) in the frame, whereby each field comprises a cumulative value, and whereby a symbol of a given frame position is assigned a field of a corresponding order number,
- 25 updating the cumulative value of the given field in the register with a first value (-1) if the respective symbol belongs to the second constellation, otherwise updating the respective field with a second value (+1),
- performing updates of multiple incoming frames of symbols,
- 30 from the accumulative values of the respective fields establishing at which positions in the incoming frame (B) the first, respectively the second, keying mode is used.
- 35 10. Method according to claim 7 or 8, wherein the frame alignment word indicates one of a predetermined group of insertion rates (Q), the insertion rate pertaining to a

predetermined rate of symbols being inserted according to the second keying order mode in relation to the symbols of the first keying order mode, is used after the frame alignment word.

5

11. Method according to claim 10, wherein the insertion rate depends on the given channel conditions which applies for the channel.
- 10 12. Method according to claim 11, wherein the measured bit error rate at the receiver is used to decide which insertion rate is used for modulation.
13. Method according to any of claims 1 - 12, wherein a weighting function (WE) in the  
15 receiver is applied to an error control signal (E') for symbols coded according to the first keying mode (H).
14. Method according to claim 13, wherein the error signal (WE) is reduced when the  
20 detected signal (E', E) approaches the decision boundaries of the first keying mode (H) and wherein responses outside the detector boundaries of the given detected symbol of the first keying mode (H) are subdued.
- 25 15. Method according to claim 14, wherein a parabolic weighting function is utilised inside the decision boundaries of the first keying mode (H).
16. Method according to claim 13 - 15, wherein no weighting function is applied to  
30 symbols associated with the second keying mode.
17. Method according to any preceding claim, wherein the method is used in combination with forward error correction coding.

35



1/10

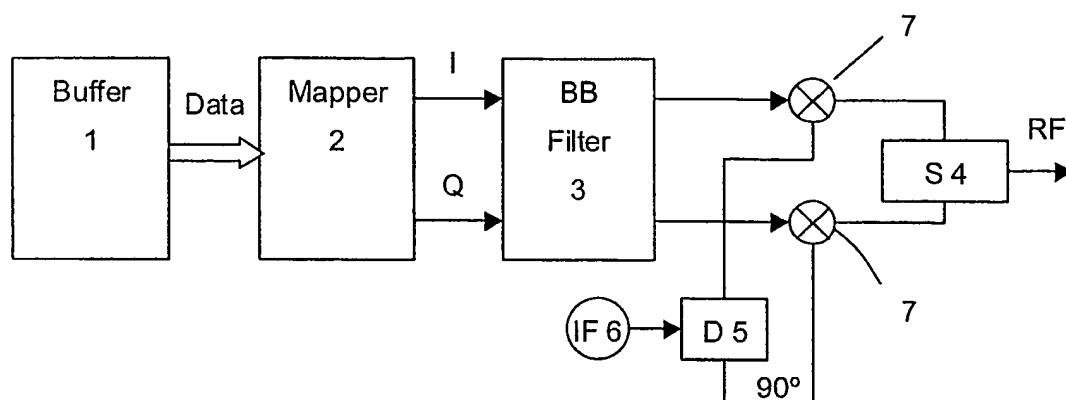


Fig. 1

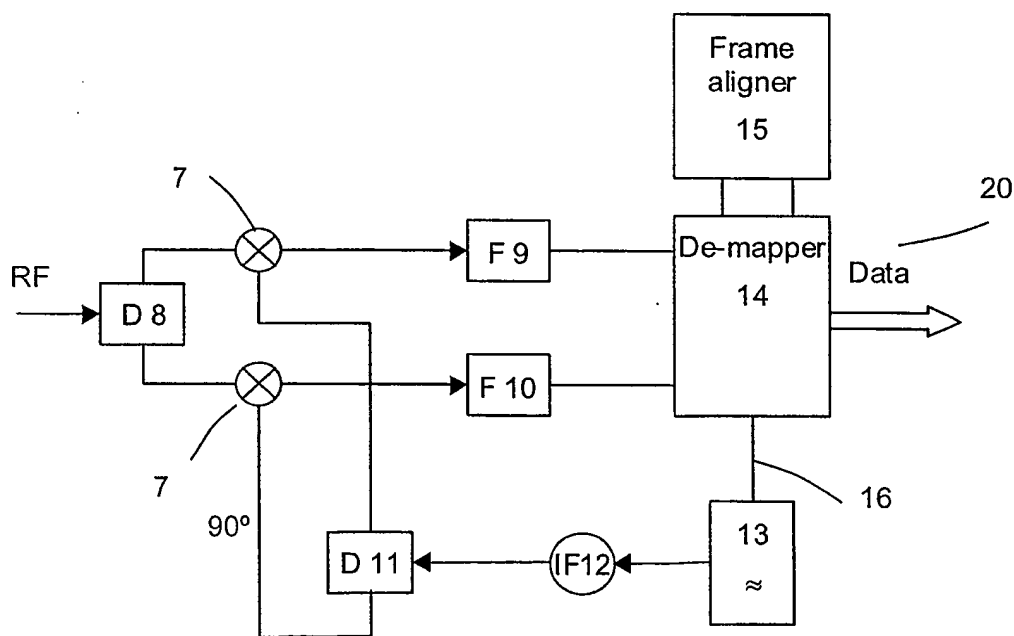


Fig. 2

2/10

FP

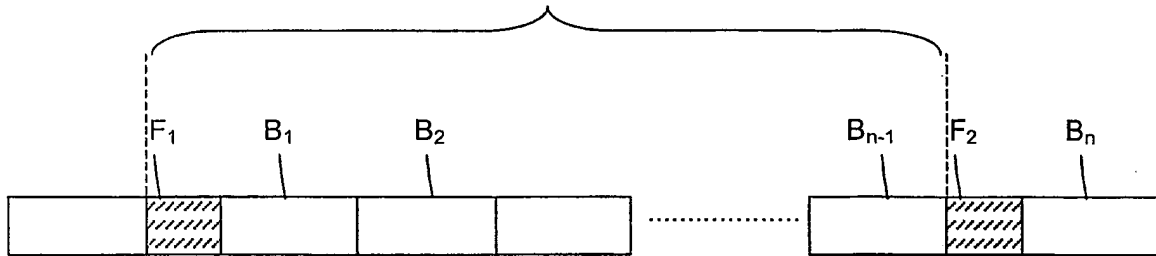


Fig. 3

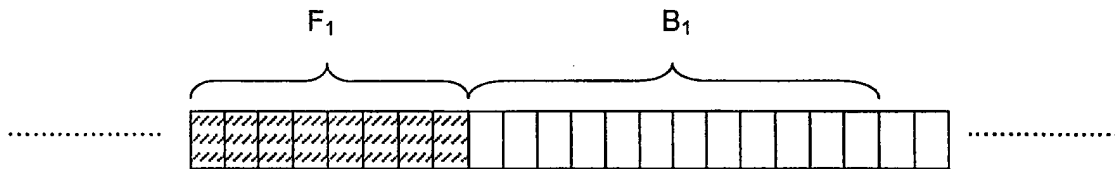


Fig. 4

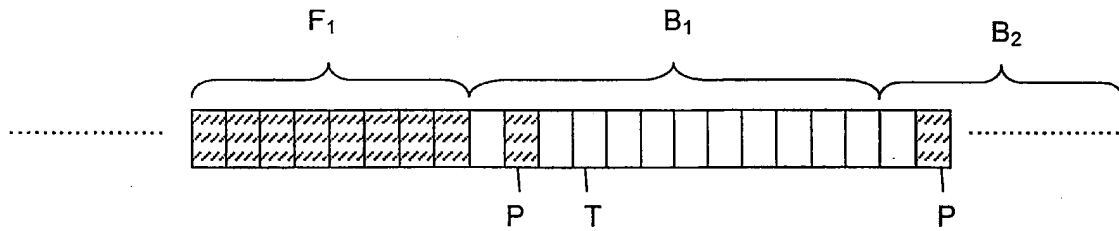


Fig. 4'




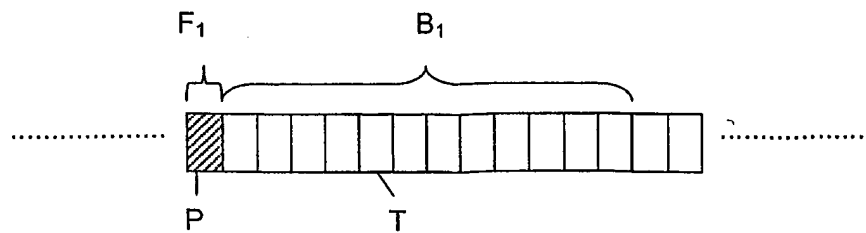


Fig. 4''

3/10

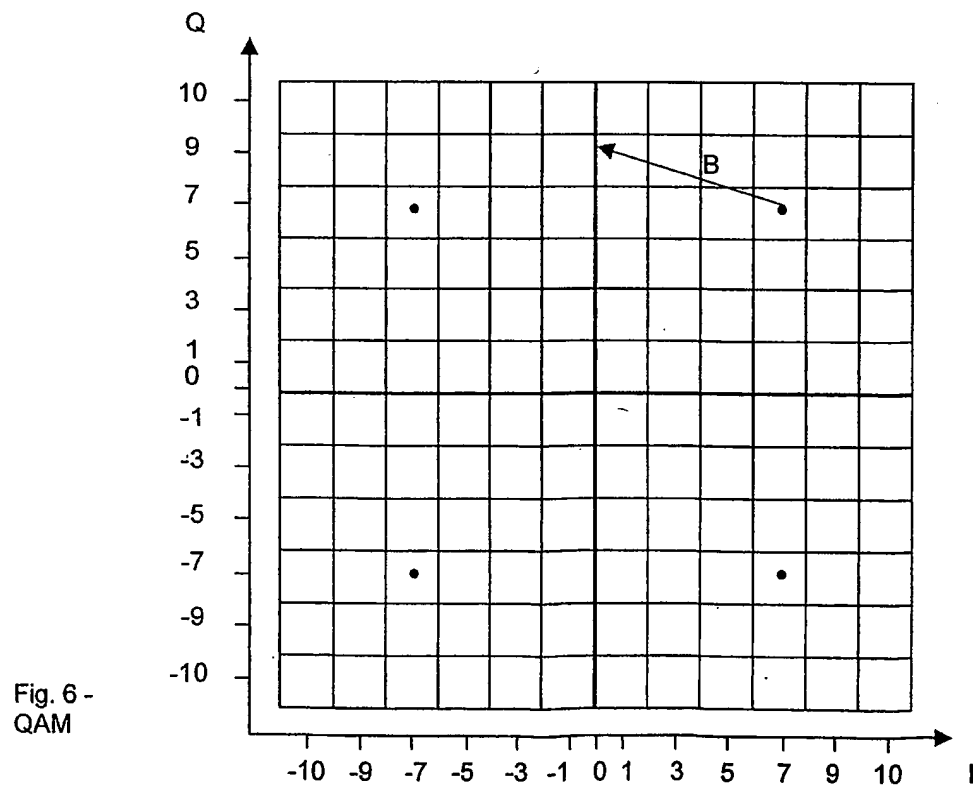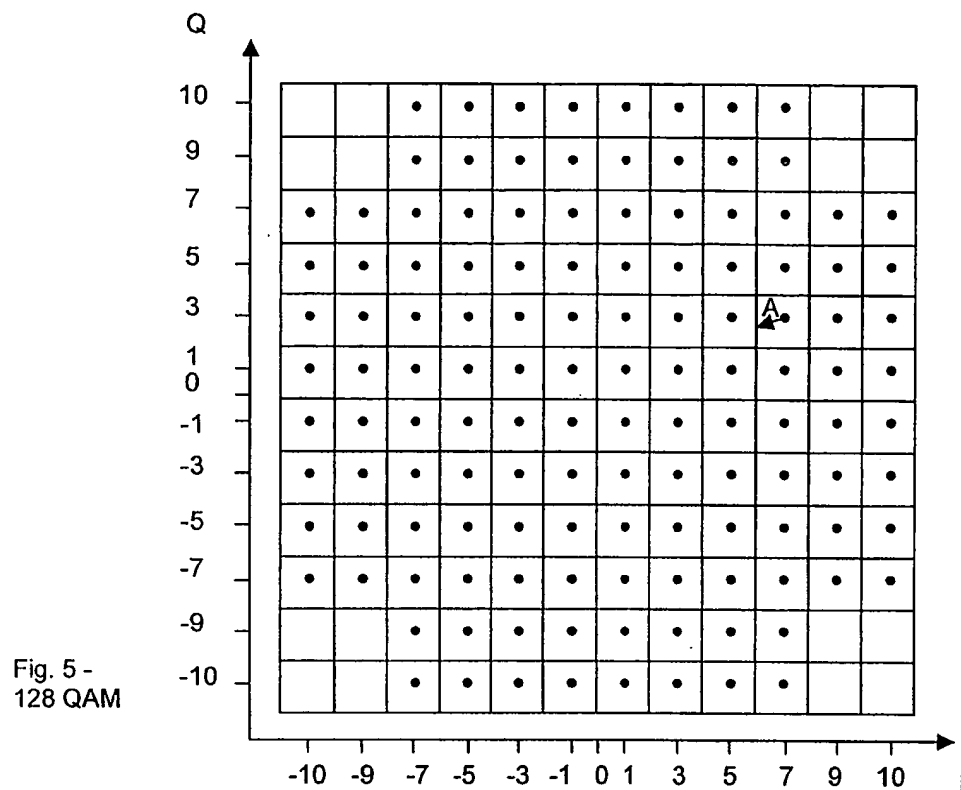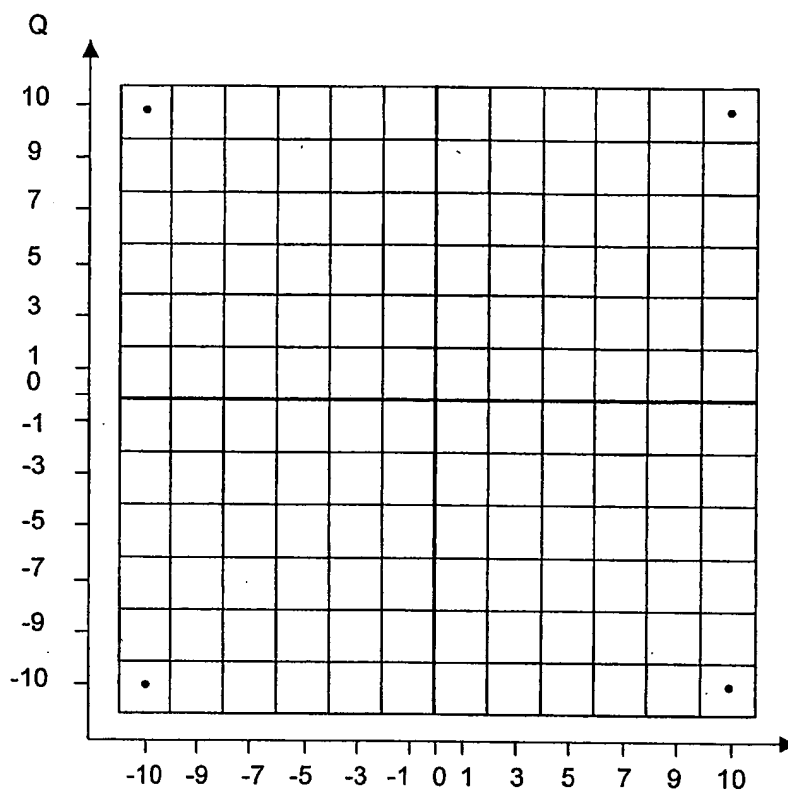

4/10

Fig. 7 -  
4-QAM

5/10

sequence order	n-1	n	n+1	n+...	n+t	n+t+1
modulation	4	128	128	...	4	128
data bit	2	7	7	....	2	7

Fig. 8

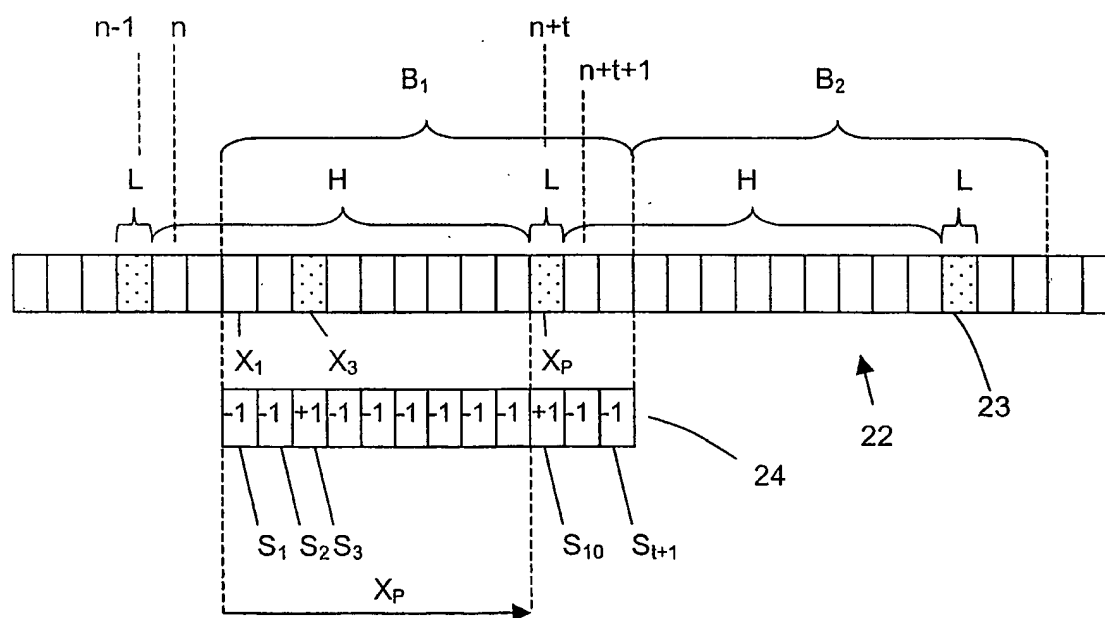


Fig. 9

6/10

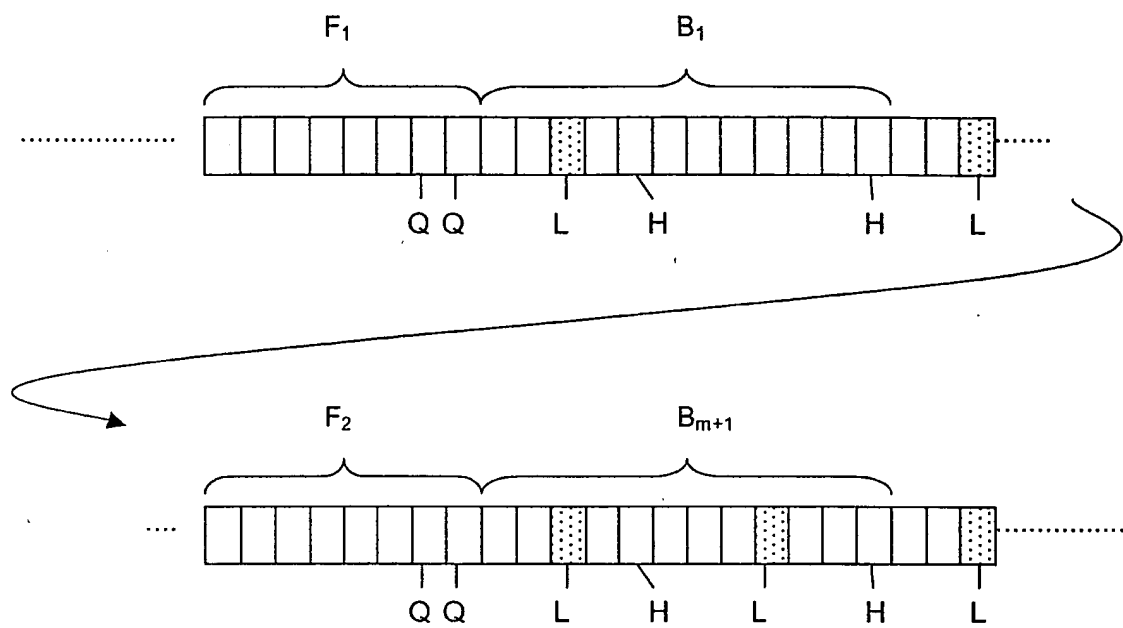


Fig. 10

7/10

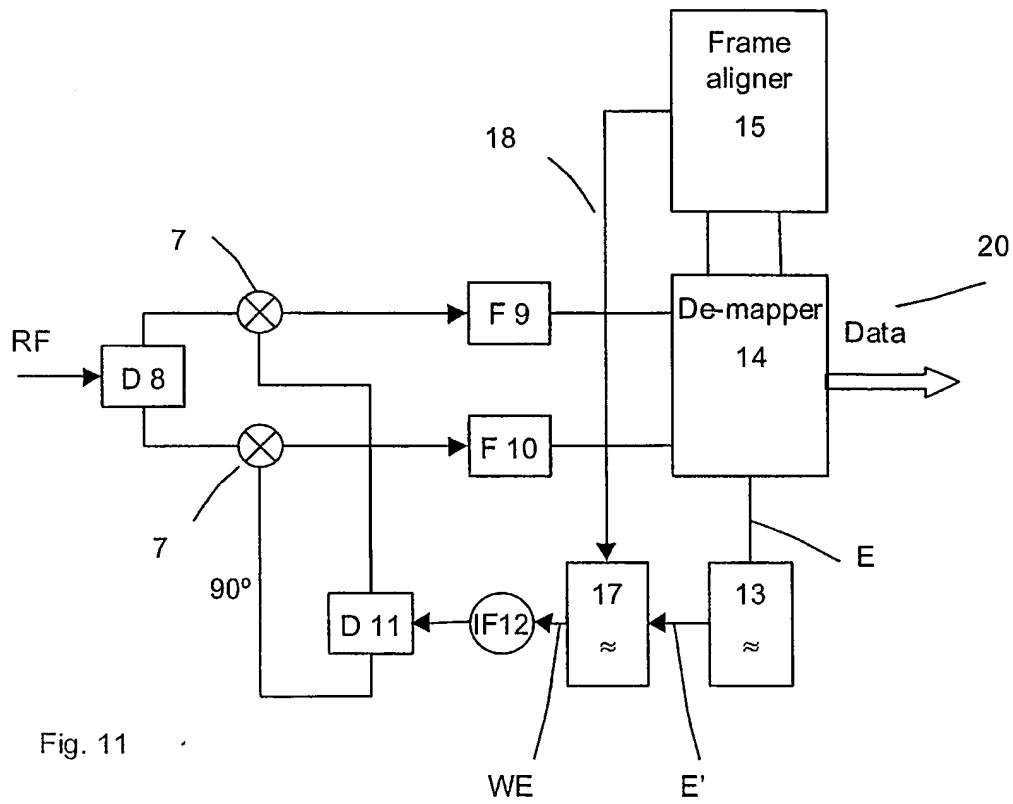


Fig. 11

8/10

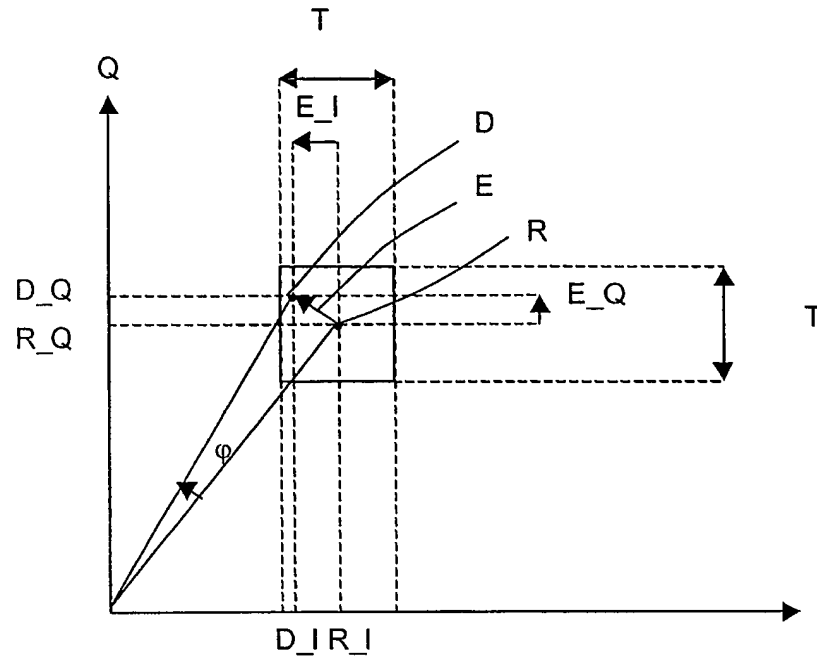


Fig. 12



9/10

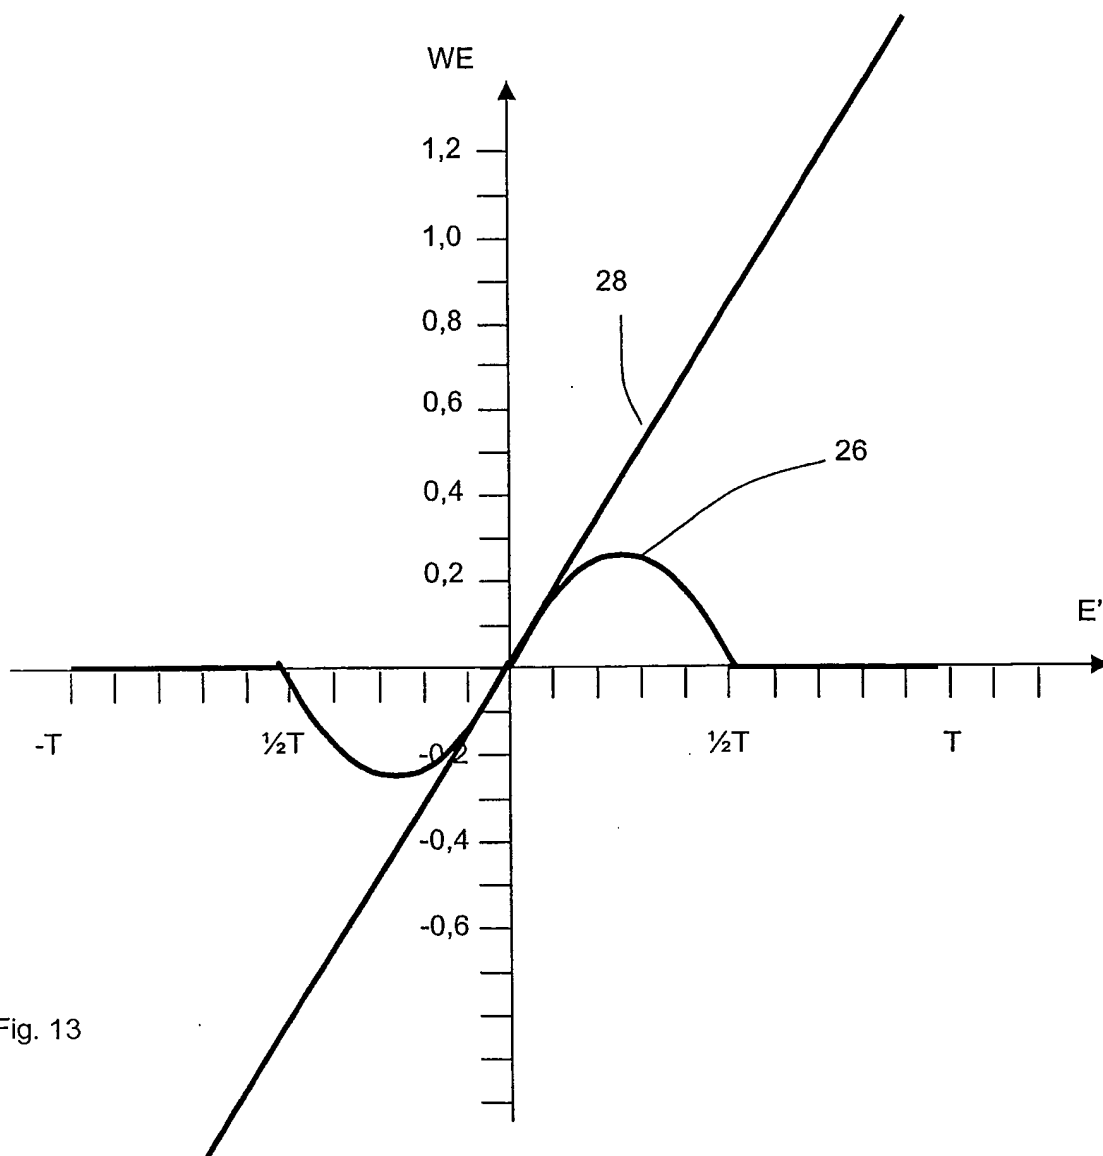


Fig. 13

10/10

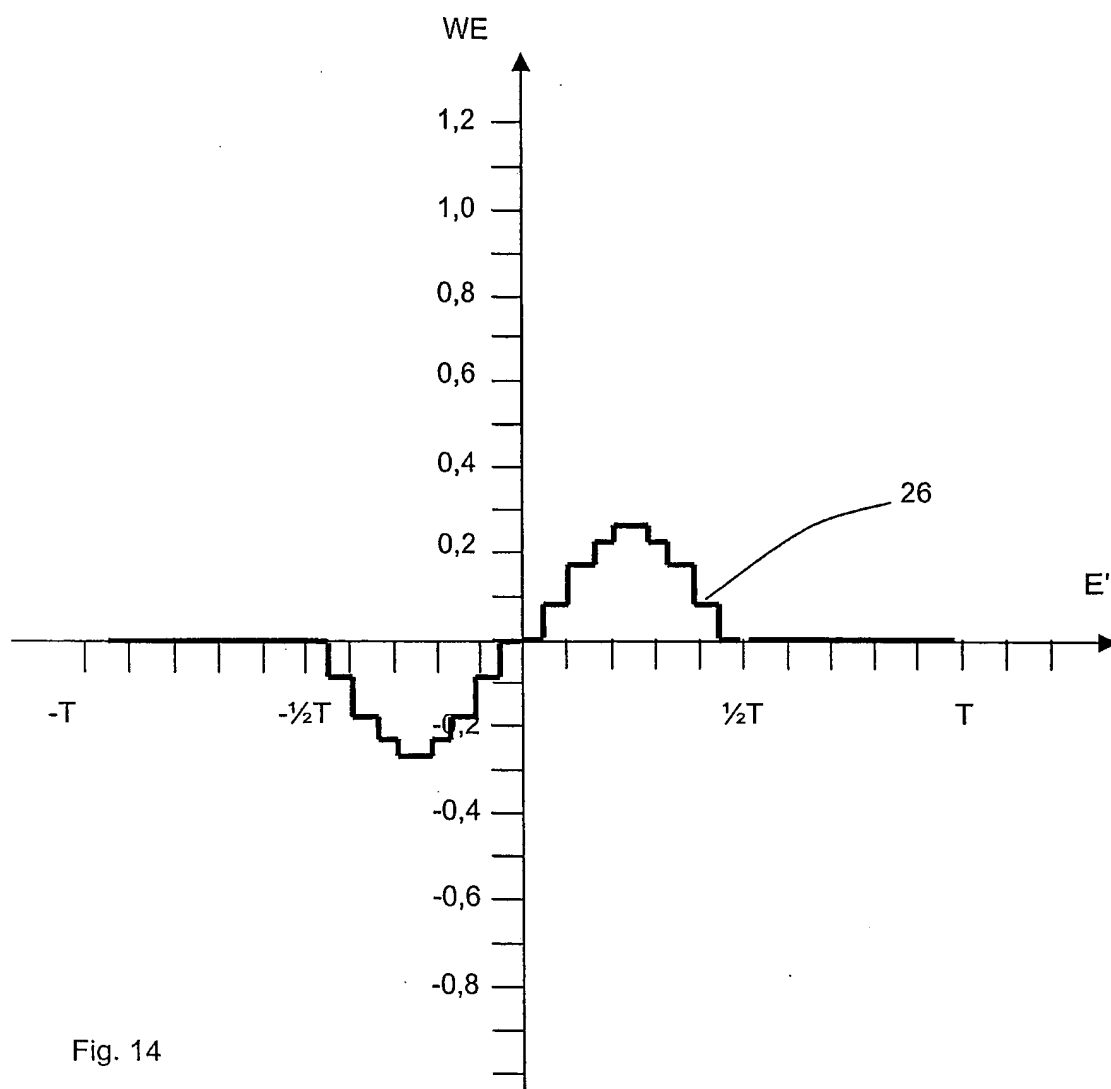


Fig. 14

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 02/01325

## A. CLASSIFICATION OF SUBJECT MATTER

IPC7: H04L 27/38

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC7: H04L, H03L, H04B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-INTERNAL, WPI DATA, PAJ, INSPEC

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 9956442 A2 (ERICSSON, INC.), 4 November 1999 (04.11.99), page 10, line 3 - line 8, figure 3 --	1-6
X	EP 0734132 A2 (KABUSHIKI KAISHA TOSHIBA), 25 Sept 1996 (25.09.96), column 8, line 25 - line 45 --	1-6
X	EP 1021019 A1 (SONY INTERNATIONAL (EUROPE) GMBH), 19 July 2000 (19.07.00), page 8, line 45 - line 49, figure 6, claim 9 --	1-6

☒ Further documents are listed in the continuation of Box C.
 ☒ See patent family annex.

* Special categories of cited documents:	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"A" document defining the general state of the art which is not considered to be of particular relevance	"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"E" earlier application or patent but published on or after the international filing date	"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"&" document member of the same patent family
"O" document referring to an oral disclosure, use, exhibition or other means	
"P" document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search	Date of mailing of the international search report
1 April 2003	14 -04- 2003
Name and mailing address of the ISA/ Swedish Patent Office Box 5055, S-102 42 STOCKHOLM Facsimile No. +46 8 666 02 86	Authorized officer Markus Stålö /OGU Telephone No. +46 8 782 25 00

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 02/01325

## C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5684842 A (DAFFARA, F. ET AL), 4 November 1997 (04.11.97), column 5, line 54 - column 7, line 10, figure 10  ---	13-16
A	US 5796786 A (LEE, M-H), 18 August 1998 (18.08.98), column 10, line 65 - column 11, line 4, figures 5-6C  -----	13-16

# INTERNATIONAL SEARCH REPORT

International application No.  
PCT/SE 02/01325

## Box I Observations where certain claims were found unsearchable (Continuation of Item 1 of first sheet)

This international search report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:  
because they relate to subject matter not required to be searched by this Authority, namely:
  
2. ☐ Claims Nos.:  
because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically:
  
3. ☐ Claims Nos.:  
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

## Box II Observations where unity of invention is lacking (Continuation of Item 2 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

see extra sheet

1. ☐ As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims.
2. ☐ As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.
3. ☒ As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims for which fees were paid, specifically claims Nos.: 1-8 and 10-16
  
4. ☐ No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

### Remark on Protest

- ☒ The additional search fees were accompanied by the applicant's protest.  
☐ No protest accompanied the payment of additional search fees.

INTERNATIONAL SEARCH REPORT

International application No.  
PCT/SE 02/01325

Since the invention according to claim 1 lacks novelty and does not involve an inventive step the remaining claims form four groups of inventions:

Invention I: Claims 2-8, 10-12 relating to a method to add a frame alignment word to the transmitted symbols, where the frame alignment word indicates the predetermined positions of symbols in a frame modulated according to a first or a second keying method.

Invention II: Claim 9 relating to a method to measure, calculate and determine which symbols, in a received frame, are modulated according to the first and second keying method.

Invention III: Claims 13-16 relating to a method to weight an error signal with a weighting function. The weighting function improves the Phase Locked Loop (PLL) in the receiver.

Invention IV: Claim 17 relating to a method to use forward error correction coding.

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 02/01325

Patent document cited in search report				Publication date		Patent family member(s)	Publication date
WO	9956442	A2	04/11/99	AU	755079	B	05/12/02
				AU	3637399	A	16/11/99
				BR	9910013	A	09/01/01
				CN	1309858	T	22/08/01
				EE	200000622	A	15/02/02
				EP	1075752	A	14/02/01
				JP	2002513247	T	08/05/02
				US	6185259	B	06/02/01
				US	2001001008	A	10/05/01
EP	0734132	A2	25/09/96	CA	2171418	A	24/09/96
				CN	1138256	A	18/12/96
				JP	3145003	B	12/03/01
				JP	8265293	A	11/10/96
				KR	197846	B	15/06/99
				US	5771224	A	23/06/98
EP	1021019	A1	19/07/00	JP	2000224137	A	11/08/00
US	5684842	A	04/11/97	CN	1083196	B	17/04/02
				CN	1128923	A	14/08/96
				EP	0692896	A	17/01/96
				FR	2722630	A	19/01/96
				JP	8181732	A	12/07/96
				FR	2733107	A	18/10/96
US	5796786	A	18/08/98	CN	1079619	B	20/02/02
				CN	1154027	A	09/07/97
				EP	0769364	A	23/04/97
				JP	9233438	A	05/09/97
				KR	113969	Y	11/04/98
				KR	155900	B	16/11/98

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☒ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**